







# BIS RapidRail® Connectors 135°

to make BIS RapidRail® fabrications

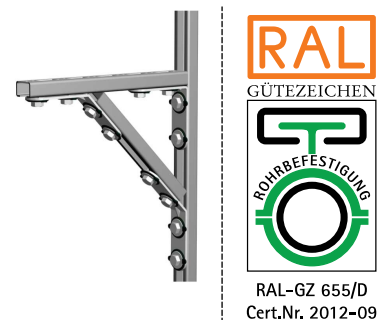

## Features and benefits

- connector with pre-assembled BIS RapidRail® Slide nut(s)
- to make rail fabrications
- suitable for WM0, 1, 15, 2, 30, 35
- with pre-assembled BIS RapidRail® Sliding nut(s) for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated

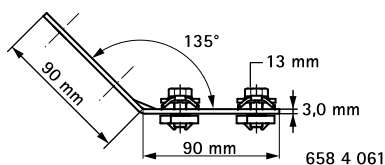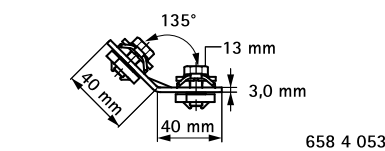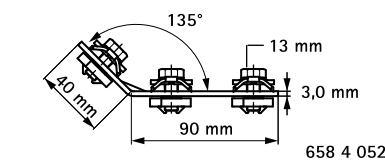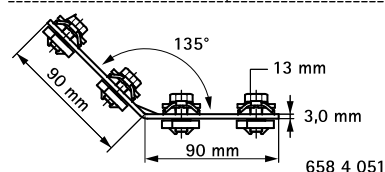

Part No.	Model	For Rail	a (°)	T (Nm)	Fa,z (N)	Fa,x (N)	RAL	Pack 1
658 4 051	Long / long	WM0 - 35	135°	15	1.562	1.109	RAL <sup>1</sup>	25
658 4 052	Short / long	WM0 - 35	135°	15	1.336	448	RAL <sup>1</sup>	25
658 4 053	Short / short	WM0 - 35	135°	15	1.336	448	RAL <sup>1</sup>	25

RAL<sup>1</sup> = tested, certified and externally monitored according to RAL-GZ 655/D in combination with Rail WM1, 2, 15 and 30.

For detailed technical information about our RAL marked products, please see the RAL datasheet in our webcatalogue: [www.walraven.com/gb/en/catalogue/](http://www.walraven.com/gb/en/catalogue/).

**Complementary**  
BIS RapidRail® Fixing Rail